

UP Workstation SYS-530T-I



More details here

Key Applications


Entry-Level System for SOHO and SMB, Storage, application and centralized data backup system Applications, IPMI for remote management,

Key Features

- Supports Intel® Xeon® E-2300 Series Processors;
- PCIe 4.0 Support;
- Dual LAN ports, GbE and dedicated IPMI LAN port;
- 9cm PWM quiet exhaust fan and optional front intake fan;
- 400W 80PLUS Gold Power Supply;



Form Factor	mini-tower Rackmount Enclosure: 184 x 362 x 425mm (7.25" x 14.25" x 16.75") Package: 279 x 508 x 533mm (11" x 20" x 21")
Processor	Single Socket H5 (LGA-1200) Intel® Xeon® processor E-2300 series and 10th Gen. Pentium® Processors Up to 8C/16T; Up to 16MB Cache
GPU	Max GPU Count: Up to 1 double-width GPU(s)
System Memory	Slot Count: 4 DIMM slots Max Memory (2DPC): Up to 128GB 3200MT/s ECC DDR4 UDIMM
Drive Bays	4x 3.5" SATA drive bays 1x PCIe 3.0 x4
Expansion Slots	1 PCIe 3.0 x2 slot(s) 2 PCIe 4.0 x8 slot(s) 1 PCIe 4.0 x4 slot(s)
On-Board Devices	Chipset: Intel® C252 Network Connectivity: 2x 1GbE BaseT with Intel® I210-AT IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	SATA: 6 SATA (6Gbps) port(s) USB: 4 USB 3.2 Gen 1 port(s) (2 front Type A; 2 rear Type A) 2 USB 2.0 port(s) (2 rear Type A) Video: 1 VGA port(s) TPM: TPM header Serial Port: 1 COM Port(s) (1 header)

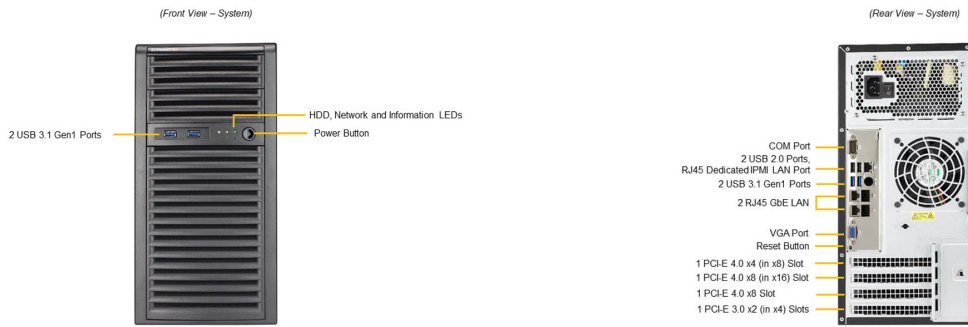

System Cooling	Fans: 1x 90mm Fan(s)
Power Supply	400W Gold Level power supply
System BIOS	BIOS Type: AMI 256MB SPI Flash
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0
PC Health Monitoring	<p>Voltage: +1.0V PCH, +1.8V PCH, +12V, +3.3V, +5V, +5V standby, 1.05 (PCH), 3.3V standby, 5 (4-pin), CPU, CPU temperature, CPU thermal trip support, PCH temperature, System temperature, VBAT, VRM temperature</p> <p>Other Features: 8-pin 12v DC power connector, ACPI power management, ATX Power connector, Chassis intrusion header, Control of power-on for recovery from AC power loss, CPU thermal trip support for processor protection, RoHS, Voltage and Frequency Overclocking, WOL</p>
Dimensions and Weight	<p>Height: 14.25" (362 mm)</p> <p>Width: 7.25" (184 mm)</p> <p>Depth: 16.75" (425 mm)</p> <p>Gross Weight: 20 lbs (9.07 kg)</p> <p>Net Weight: 16 lbs (7.26 kg)</p> <p>Packaging: 20" (H) x 11" (W) x 21" (D)</p> <p>Available Color: Black</p>
Operating Environment	<p>Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F)</p> <p>Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)</p> <p>Operating Relative Humidity: 8% to 90% (non-condensing)</p> <p>Non-operating Relative Humidity: 5% to 95% (non-condensing)</p>
Motherboard	Super X12STL-F
Chassis	CSE-731I-404B