

Ultra SuperServer SYS-610U-TNR




More details here

Key Applications

Virtualization, HPC, Cloud Computing, High End Enterprise Server, Software Defined Storage, Application Tier Service Provider, 5G/Telco,


Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- Intel® C621A Chipset;
- 32 DIMM Slots; Up to 8TB DRAM; Up to 8TB Intel® Optane™ Persistent Memory (up to 12TB with DRAM); 3200/2933/2666 ECC DDR4 LRDIMM; RDIMM; Intel® Optane™ Persistent Memory 200 series;
- 1 PCIe 4.0 x16 (LP); 1 Internal PCIe 4.0 x16; 2 PCIe 4.0 x16 (FH, 10.5"L);
- Flexible networking options;
- 4x3.5" hot-swap hybrid NVMe/SATA/SAS drive bays;
- 8 heavy duty fans with optimal fan speed control;
- 1200W redundant Titanium level power supplies;

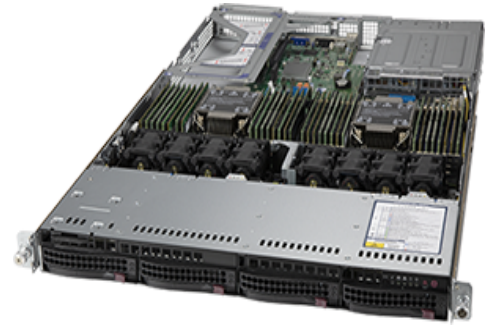

Form Factor	1U Rackmount Enclosure: 437 x 43 x 754mm (17.2" x 1.7" x 29.7") Package: 605 x 203 x 950mm (23.81" x 7.99" x 37.4")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T; Up to 60MB Cache per CPU
GPU	Max GPU Count: Up to 2 double-width or 2 single-width GPU(s) Supported GPU: NVIDIA PCIe: RTX A4000,A16,A100,A30,A2,T4
System Memory	Slot Count: 32 DIMM slots Max Memory (2DPC): Up to 8TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel® Optane™ persistent memory 200 series
Drive Bays	4x 3.5" hot-swap NVMe/SATA/SAS drive bays (4x 2.5" NVMe hybrid)(SAS/NVMe support requires additional parts. Please see the Optional Parts list.)
Expansion Slots	1 PCIe 4.0 x16 Internal LP slot(s) 1 PCIe 4.0 x16 LP slot(s) 2 PCIe 4.0 x16 FH, 10.5"L slot(s)
On-Board Devices	SATA: SATA3 (6Gbps); RAID 0/1/5/10 support NVMe: NVMe (16GT/s); RAID 0/1/5/10 support Chipset: Intel® C621A Network Connectivity: 2x 10GbE BaseT with Intel® X710-AT2 (optional) OR 2x 10GbE BaseT and 2x 10GbE SFP+ with Intel® X710-TM4 (optional) No NIC option supported IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 Dedicated BMC LAN port USB: 2 USB 3.0 port(s) (2 rear) Video: 1 VGA port(s) Serial Port: 1 COM Port(s) (1 rear) DOM: 2 SuperDOM (Disk on Module) port


(Front View – System)



Slot	Description
1 - 5	3.5" Hot-swap NVMe/SAS3/SATA3 Drive Bays
6	Slim DVD or 2.5" SSD Bay**
7	Slim Floppy or 2.5" SSD Bay**

*SAS3 support requires additional parts in optional parts list
 **DVD, Floppy, or 2.5" SSD support requires additional parts in optional parts list

(Rear View – System)

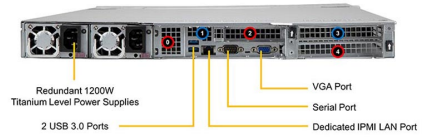

Slot	Description
1	Ultra Riser Networking Slot
2	PCE 4.0 x16 Slot (Internal LP)
3	PCE 4.0 x16 Slot (LP)
4	PCE 4.0 x16 Slot (FH, 10.5")
5	PCE 4.0 x16 Slot (FH, 10.5")

System Cooling	Fans: 8x 4cm heavy duty fans with optimal fan speed control Air Shroud: 2 Air Shroud(s)
Power Supply	1200W Redundant Titanium Level power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 7 +1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Height: 1.7" (43 mm) Width: 17.2" (437 mm) Depth: 29.7" (754 mm) Gross Weight: 44.5 lbs (20.2 kg) Net Weight: 29.5 lbs (13.4 kg) Packaging: 7.99" (H) x 23.81" (W) x 37.4" (D) Available Color: Black Front & Silver Body
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X12DPU-6
Chassis	CSE-819U3TS-R1K22P-T