

GrandTwin SuperServer SYS-210GT-HNC8F



More details here

Key Applications

HPC, Cloud Gaming, MEC (Multi-Access Edge Computing), Multi-Purpose CDN, High-availability Cache Cluster, Telco Edge Cloud, EDA (Electric Design Automation), Mission Critical Web Applications,

Key Features



- Single-Socket, 3rd Gen Intel® Xeon® Scalable processors up to 270W TDP;
- Intel® C621A;
- 16 DIMM Slots up to 4TB;
- Optional: AIOM PCIe 4.0 x16 LP (OCP 3.0 compliant);
- Two optional storage modules. Each module supports 2x NVMe or SAS/SATA drive bays;
- 2x cooling fans per 2U enclosure, 16.5K RPM Heavy Duty; Shared Cooling Design;
- 2200W Redundant Power Supplies Titanium Level (96%+); Shared Power Design;
- Built-in SAS3 Support via Broadcom 3808; IT Mode;



Form Factor	2U Rackmount Enclosure: 449 x 88 x 711.2mm (17.67" x 3.46" x 28") Package: 626 x 248 x 1150mm (24.65" x 9.76" x 45.28")
Processor	Single Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T; Up to 60MB Cache
System Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM
Drive Bays	4x 2.5" hot-swap NVMe/SATA/SAS drive bays (4x 2.5" NVMe dedicated) 2 M.2 NVMe OR 2 M.2 SATA3
Expansion Slots	1 PCIe 4.0 x16 slot(s)
On-Board Devices	SAS: SAS3 (12Gbps) via Broadcom® 3808 (IT mode) Chipset: Intel® C621A Network Connectivity: Via IO Module IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 Dedicated BMC LAN port USB: 2 USB 3.0 port(s) (2 USB) Video: 1 VGA port(s)

(Front View – System)

(Rear View – System)

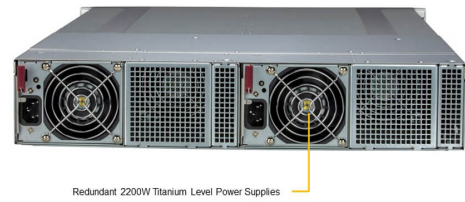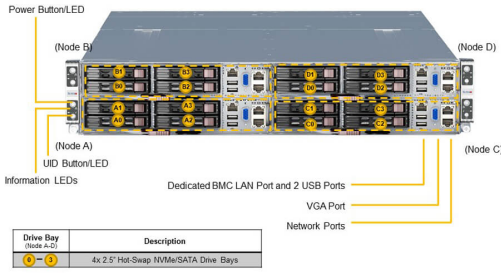

System Cooling	Fans: 2x 16.5K RPM Heavy Duty 8cm Fan(s)
Power Supply	2200W Redundant Titanium Level power supplies
System BIOS	BIOS Type: AMI 32MB Flash ROM
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0
PC Health Monitoring	FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment CPU: Monitors for CPU Cores, Chipset Voltages, Memory. 7+1 Phase-switching voltage regulator
Dimensions and Weight	Height: 3.46" (88 mm) Width: 17.67" (449 mm) Depth: 28" (711.2 mm) Gross Weight: 88 lbs (39.9 kg) Net Weight: 68 lbs (30.8 kg) Packaging: 9.76" (H) x 24.65" (W) x 45.28" (D) Available Color: Black front & silver body
Operating Environment	ROHS: RoHS Compliant Operating Temperature: 5°C ~ 40°C (41°F ~ 104°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	Super X12SPT-GC
Chassis	CSE-GT214BF-R2K21BP