

# Storage SuperServer SSG-122B-NE316R

1U front-loading all-flash storage server with 16 E3.S NVMe drives and PCIe 5.0



## Key Applications

Software-defined Storage, In-Memory Computing, Scale Out All-Flash NVMe Storage, Data Intensive HPC, Private & Hybrid Cloud, NVMe Over Fabrics Solution, Enhanced Graphics&AI, Generative AI,

## Key Features

- Dual Socket E2 (LGA-4710) Intel® Xeon® 6 6700 series processors with E-cores  
Support CPU TDP up to 300W with air cooling;
- Up to 32 DIMMs supporting up to 8TB DDR5-6400 in 2DPC;
- Flexible networking with up to 2 OCP 3.0 compatible AIOM slots;
- Up to 2 PCIe 5.0 x16 FHHL + 2 PCIe 5.0 x16 AIOM slots;
- Up to 16 front hot-swap E3.S 1T NVMe drive bays;
- Up to 2 single-width GPUs (Max TDP 300W);




<b>Form Factor</b>	1U Rackmount Enclosure: 438.4 x 43.6 x 772.15mm (17.2" x 1.7" x 30.4") Package: 672 x 224 x 1100mm (26.46" x 8.82" x 43.31")
<b>Processor</b>	Dual Socket E2 (LGA-4710) Intel® Xeon® 6700 series processors with E-cores Up to 144C/144T; Up to 108MB Cache per CPU
<b>GPU</b>	Max GPU Count: Up to 2 single-width GPUs CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
<b>System Memory</b>	Slot Count: 32 DIMM slots/2 Channels Max Memory (1DPC): Up to 4TB 6400MT/s ECC DDR5 RDIMM/LRDIMM Max Memory (2DPC): Up to 8TB 5200MT/s ECC DDR5 RDIMM/LRDIMM
<b>Drive Bays Configuration</b>	Default: Total 16 bays • 16 front hot-swap E3.S 1T NVMe drive bays M.2: 2 M.2 NVMe slots (M-key 2280/22110)
<b>Expansion Slots</b>	Default • 2 PCIe 5.0 x16 FHHL slots • 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)
<b>On-Board Devices</b>	NVMe: NVMe; RAID 0/1/5/10 support(VROC HW key required) Chipset: System on Chip Network Connectivity: Via AIOM
<b>Input / Output</b>	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) Video: 1 VGA port

(Front View – System)



Drive Bay	Description
0 - 15	16 E3.S (7.5mm) Drive Bays

(Rear View – System)

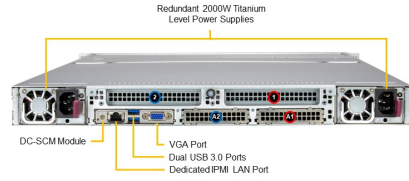

Slot	Slot Description
1, 2	PCIe 5.0 x16 F/H/L
3, 4	PCIe 5.0 x16 A/O/M



System Cooling	Fans: 8x 4cm heavy duty fans with optimal fan speed control Air Shroud: 1 Air Shroud
Power Supply	2x 2000W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 7 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 66.8 lbs (30.3 kg) Net Weight: 43.6 lbs (19.8 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-condensing) Non-operating Relative Humidity: 8% to 95% (Non-condensing)
Motherboard	<a href="#">Super X14DBHM</a>
Chassis	<b>CSE-146E32-R2K09P</b>